

## Farm greenhouses -TLF 9.6 With heat-saving two-layer coating PRODUCTION COMPANIES "GREENHOUSE LUX"

Greenhouses are designed for year-round operation in all climatic regions of Ukraine.  
Greenhouse frame is made from galvanized pipe with a zinc coating not less than 275 g / m.  
The standard length of 32 meters of greenhouses, 44 meters, 50 meters

Width greenhouse **9.6 m**, height **4.5 m**, **5,0 m**, **6.0 m**.

Ability **to block** hothouses

Strength under **GOST**

Made from **galvanized** pipe

Vertical wall height of 2000, 2500, 3000 mm

Options **greenhouse film** with a **guarantee** of 5 years and 7 years

**Thermos system** - two-layer film with a supercharged

Top, front, side **ventilation**


Opportunity-year operation

**Delivery** anywhere in the world

Services in installing and **installation supervision**

WARRANTY, SERVICE, SUPPORT

Irrigation systems, supplementary lighting, ventilating

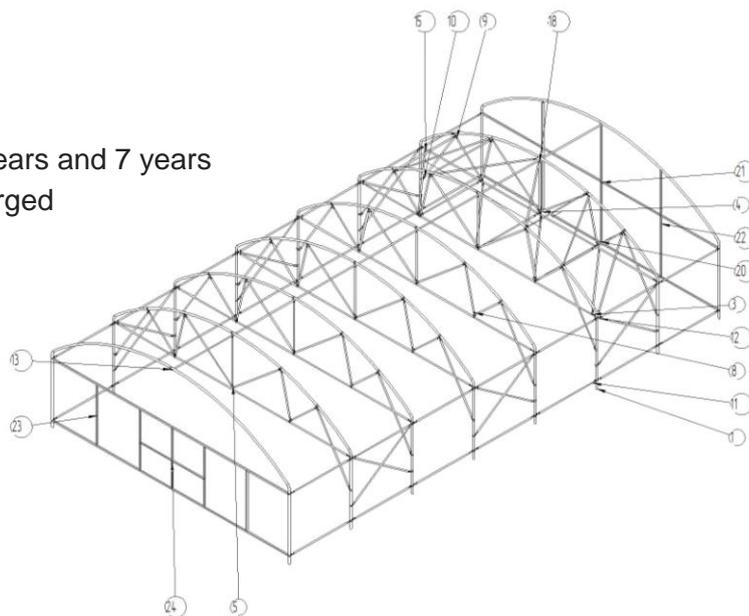

Greenhouse series TLF our customers grow tomatoes, cucumbers, peppers, greens, lettuce, grapes, pine seedlings and ornamental plants, Pot culture; they are used for the organization of landscape centers



**T-lux**  
светопрозрачные  
конструкции

ТОВ «ТЕПЛИЦЯ ЛЮКС»  
Україна, 02094, м. Київ, вул. Червоноткацька, буд. 29, кв. 107  
ЄДРПОУ 37204051, ІПН 372040526533, № свід. 100298701  
Р/р 26005060717709, Банк Київське ГРУ ПАТ «ПриватБанк», МФО 321842  
тел. +380 (44) 362-42-82, 362-88-33, тел/ф. 292-35-77



	Price FCA Kiev, Ukraine
Greenhouse frame of galvanized pipe (275 g / square meter)	18 USD / sq. m
Set of two-layer film (150 micron, 10 seasons) supercharged and mounting system	6 USD / sq. m
Polycarbonate with accessories and fasteners	0,5 USD / sq. m
Installation services of the frame greenhouses and shelters film	5 USD / sq. m
Services in installation supervision	2 USD / sq. m



## DESCRIPTION CONSTRUCTION greenhouses **TLF** SERIES

Greenhouses **TLF series** are designed to operate in all climatic zones of Ukraine. It is also possible to use the greenhouse in most climatic zones of Saudi Arabia, Kazakhstan, Georgia, Azerbaijan, Russia and other countries in Asia and Europe.

Collapsible design greenhouses provides delivery to the installation site by any mode of transport, quick installation volume design as well as the rapid dismantling, if necessary, transfer the greenhouses to the new location.

Complete with attached greenhouses detailed instructions on assembly and installation. If necessary, consultations will be available on the phone or check our specialists for installation and installation supervision.

**Racks greenhouses** - made from galvanized pipe  $\varnothing$  60mm. Racks greenhouses are arranged with a pitch - 2.5 m.

**Arch greenhouses** are located in increments of 2.5 m.  
The upper truss chords are made of galvanized pipe  $\varnothing$  60  
Lower truss belt made of galvanized pipe  $\varnothing$  45 mm  
Links between the upper and lower chord are made of galvanized pipe  $\varnothing$  30 mm

**Wind communications** - made from galvanized pipe  $\varnothing$  30 mm. X-bracing installed along the edges of the greenhouse, as well as in the central span.

**Doors, gates.** (Coating Material - Polycarbonate)  
Standard dimensions of doors - 1.0 x 2.1 m. (Can be equipped with two end doors)  
Standard dimensions of the gate - 3.0 x 2.1 m. (Can be equipped with two end gates)

### **Venting**

Front - two transoms size 6.0 x 2.0 m. With manual transmission. Made of galvanized pipe 30h30h2 mm.  
Transom sheathed honeycomb polycarbonate.  
Side - available as an option. The flywheel and the shaft for winding the film to a height of one meter on each long side of the greenhouse. Drive manual.  
Top - available as an option. Electromechanical drive.

### **Coverage**

Greenhouse film in one or two layers. Thickness of 150 microns (150 microns x 2). UV - protection - 10 seasons and 14 seasons.

### **Mounting films**

Plastic clips or system "Zigzag" with aluminum profile.

### **Fixing and connecting elements.**

They have a special zinc or other corrosion-resistant coating.

Delivered in a special package, with detailed specification and description of the places of application.

### **Pressurization system**

Electric fan, corrugated pipes, fasteners and connections.



Sales: +38 (044) 222 999 7

Logistics Department: +38 (044) 362 88 33

Chief Engineer: +38 (050) 462 38 93

[www.teplitca.com.ua](http://www.teplitca.com.ua)

e-mail: [teplitca1@gmail.com](mailto:teplitca1@gmail.com)